


ALUMINUM CONSUMER APPLICATION



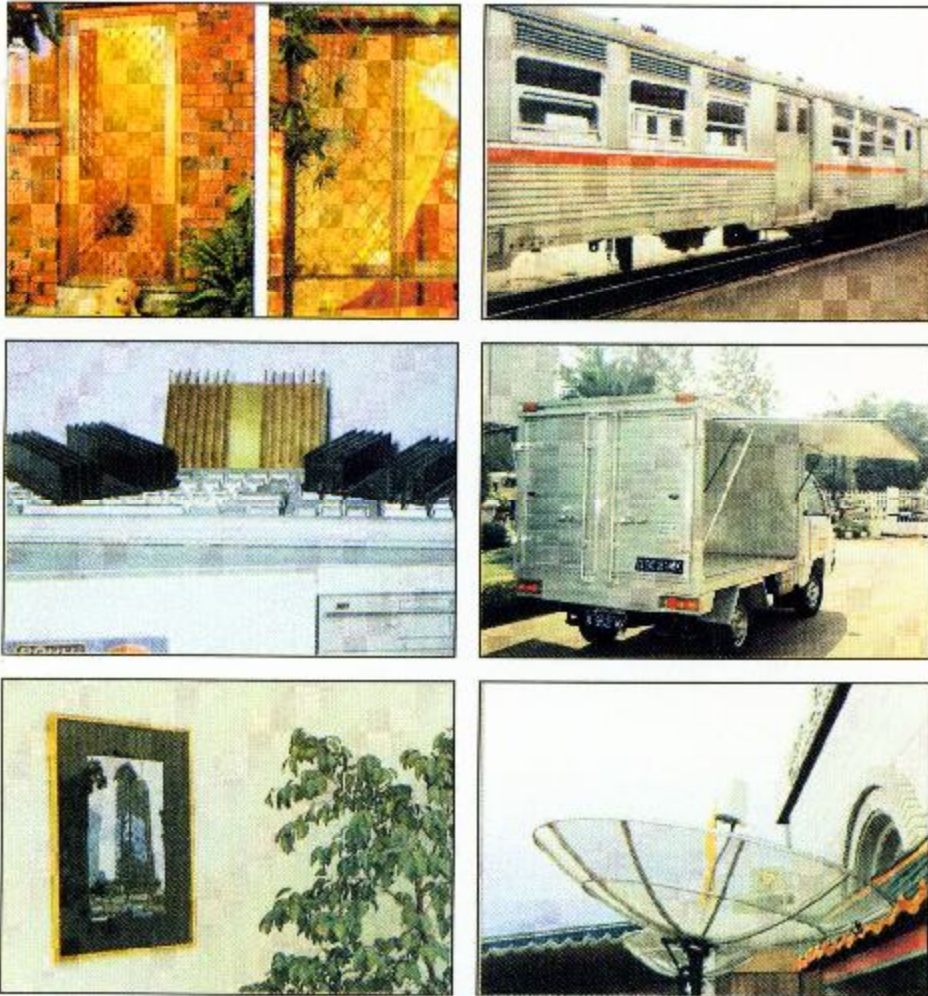


Consumer Application

Coat Hanger



1939

W : 0.231 Kg/m
Per : 144.57 mm

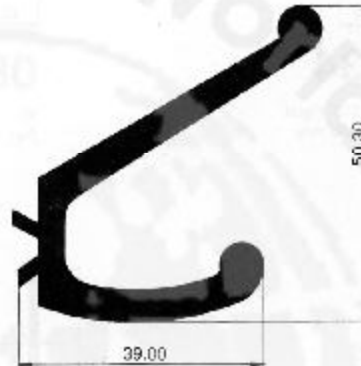


1940

W : 1.443 Kg/m
Per : 233.582 mm




0403

W : 0.295 Kg/m
Per : 133.30 mm

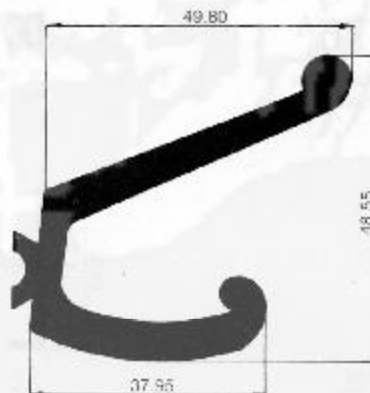


0404

W : 1.768 Kg/m
Per : 247.65 mm




0269

W : 0.283 Kg/m
Per : 146.23 mm




0626^B

W : 0.206 Kg/m
Per : 142.37 mm




0124^A

W : 0.293 Kg/m
Per : 147.98 mm




1358

W : 0.191 Kg/m
Per : 138.38 mm




2206

W : 0.194 Kg/m
Per : 140.39 mm



2323

W : 0.175 Kg/m
Per : 130.24 mm



0968

W : 0.378 Kg/m
Per : 142.10 mm



0303^R

W : 0.079 Kg/m
Per : 50.60 mm



Consumer Application

Curtain Track



0318

W : 2.027 Kg/m
Per : 235.71 mm




0851

W : 1.115 Kg/m
Per : 355.92 mm



0317

W : 0.871 Kg/m
Per : 116.74 mm




0917

W : 0.645 Kg/m
Per : 203.12 mm



0852

W : 0.513 Kg/m
Per : 133.35 mm




0754

W : 0.386 Kg/m
Per : 121.21 mm




Consumer Application

Glass Brackets

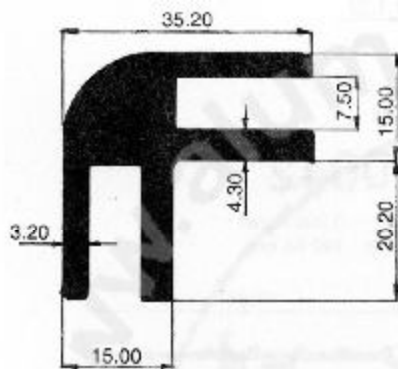


1018

W : 1.359 Kg/m
Per : 207.21 mm

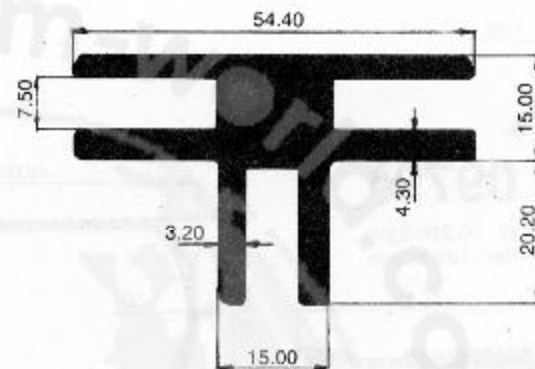

1019

W : 1.857 Kg/m
Per : 293.56 mm

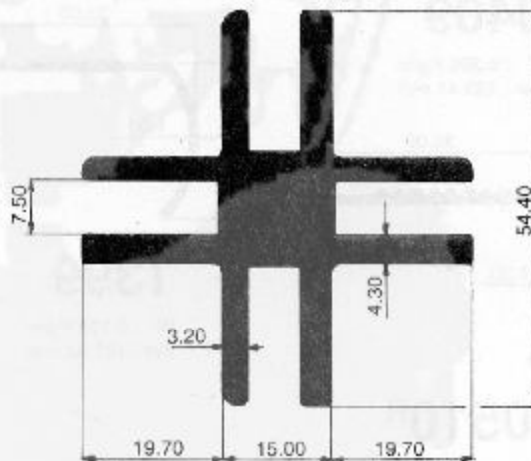


1020

W : 2.243 Kg/m
Per : 374.23 mm




Consumer Application

Heat Sink

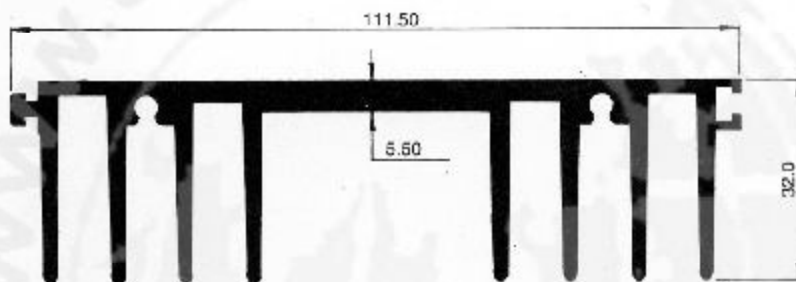

3304

W : 2.399 Kg/m
Per : 599.721 mm

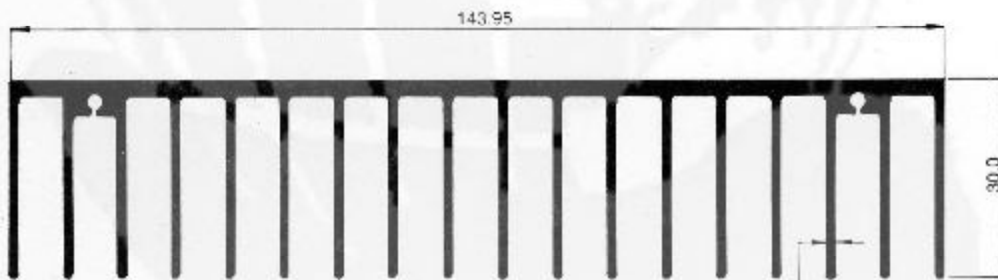


2897

W : 2.451 Kg/m
Per : 1277.22 mm



Consumer Application

Roller Shutter

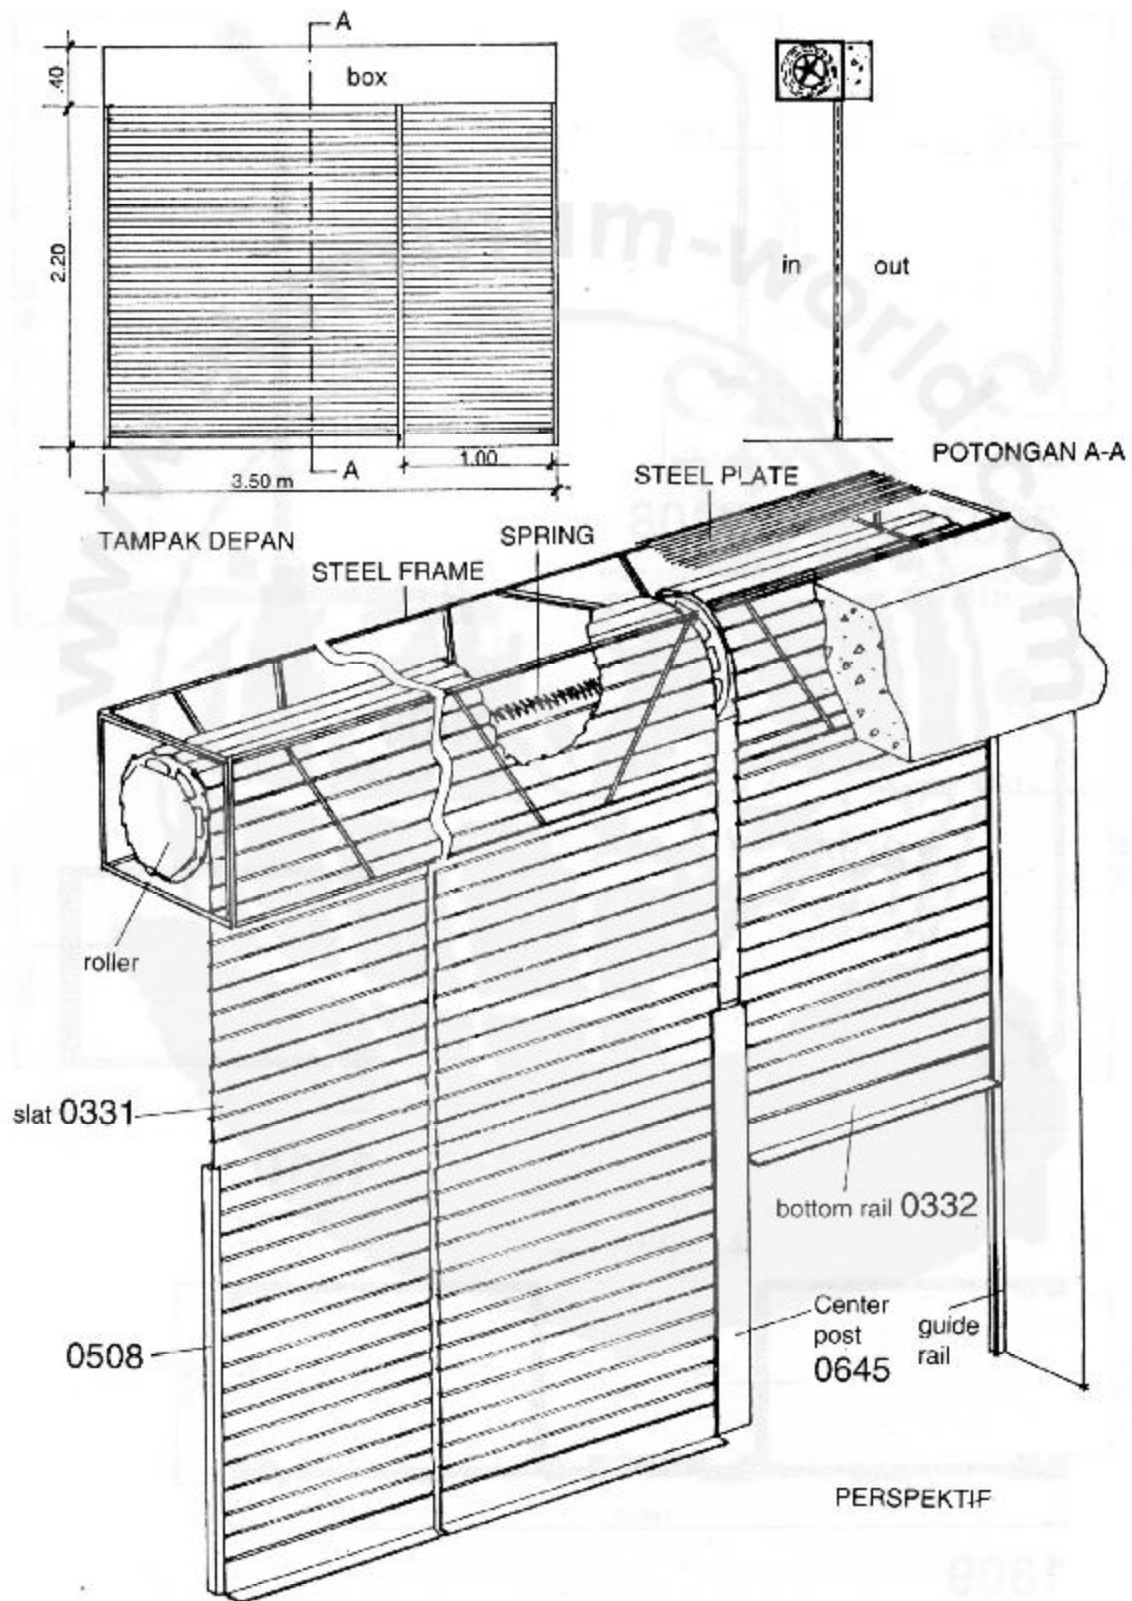




Consumer Application

Roller Shutter




2207A

W : 0.280 Kg/m
Per : 153.65 mm



2408

W : 0.272 Kg/m
Per : 153.01 mm

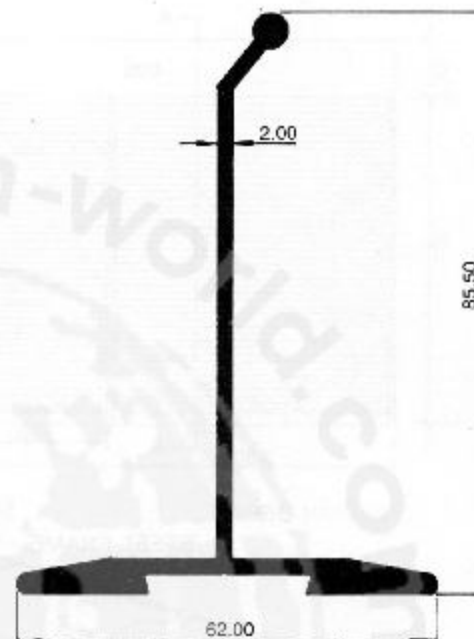


1808

W : 1.048 Kg/m
Per : 299.06 mm



1807

W : 0.328 Kg/m
Per : 166.32 mm

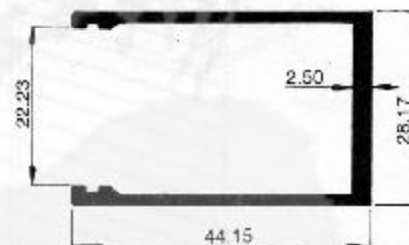


1810

W : 0.566 Kg/m
Per : 237.42 mm




1809

W : 1.391 Kg/m
Per : 535.68 mm




0331A

W : 0.388 Kg/m
Per : 170.09 mm




1121

W : 0.353 Kg/m
Per : 164.32 mm

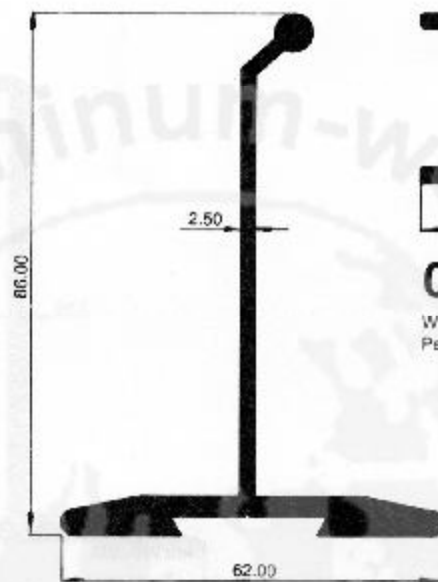


0332A

W : 1.318 Kg/m
Per : 293.85 mm




0508

W : 0.623 Kg/m
Per : 230.91 mm

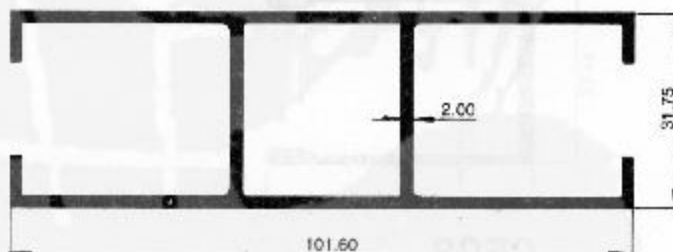

0432

W : 1.562 Kg/m
Per : 456.00 mm

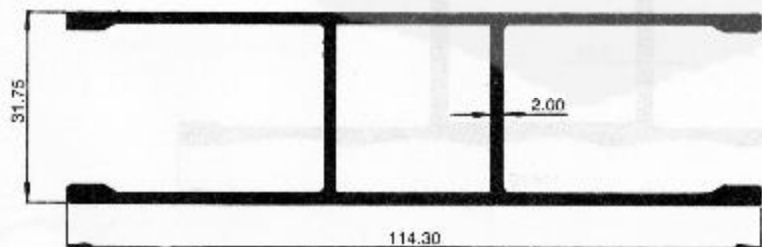


0431

W : 1.640 Kg/m
Per : 466.66 mm




Consumer Application Roller Shutter

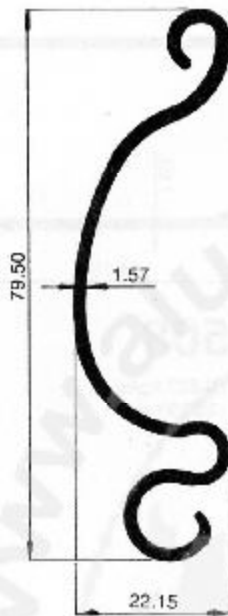


0268

W : 0.570 Kg/m
Per : 268.40 mm

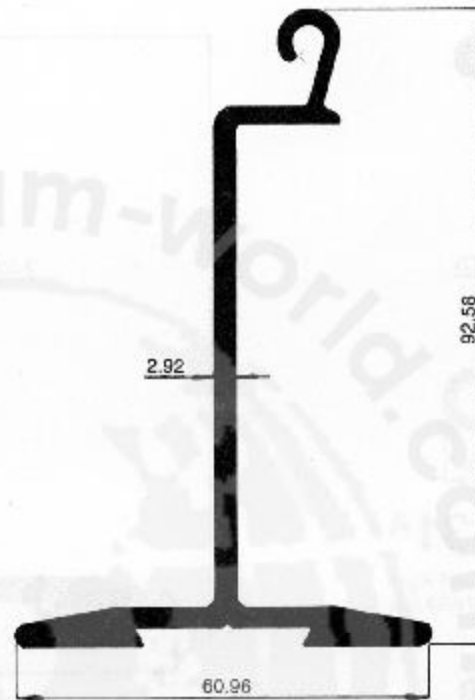


0574

W : 1.499 Kg/m
Per : 354.86 mm

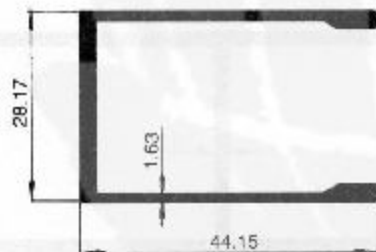

0508

W : 0.623 Kg/m
Per : 320.91 mm

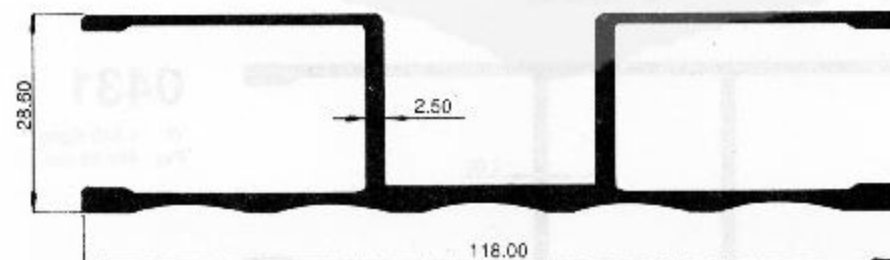


0645A

W : 1.494 Kg/m
Per : 517.08 mm



Consumer Application


Show Case

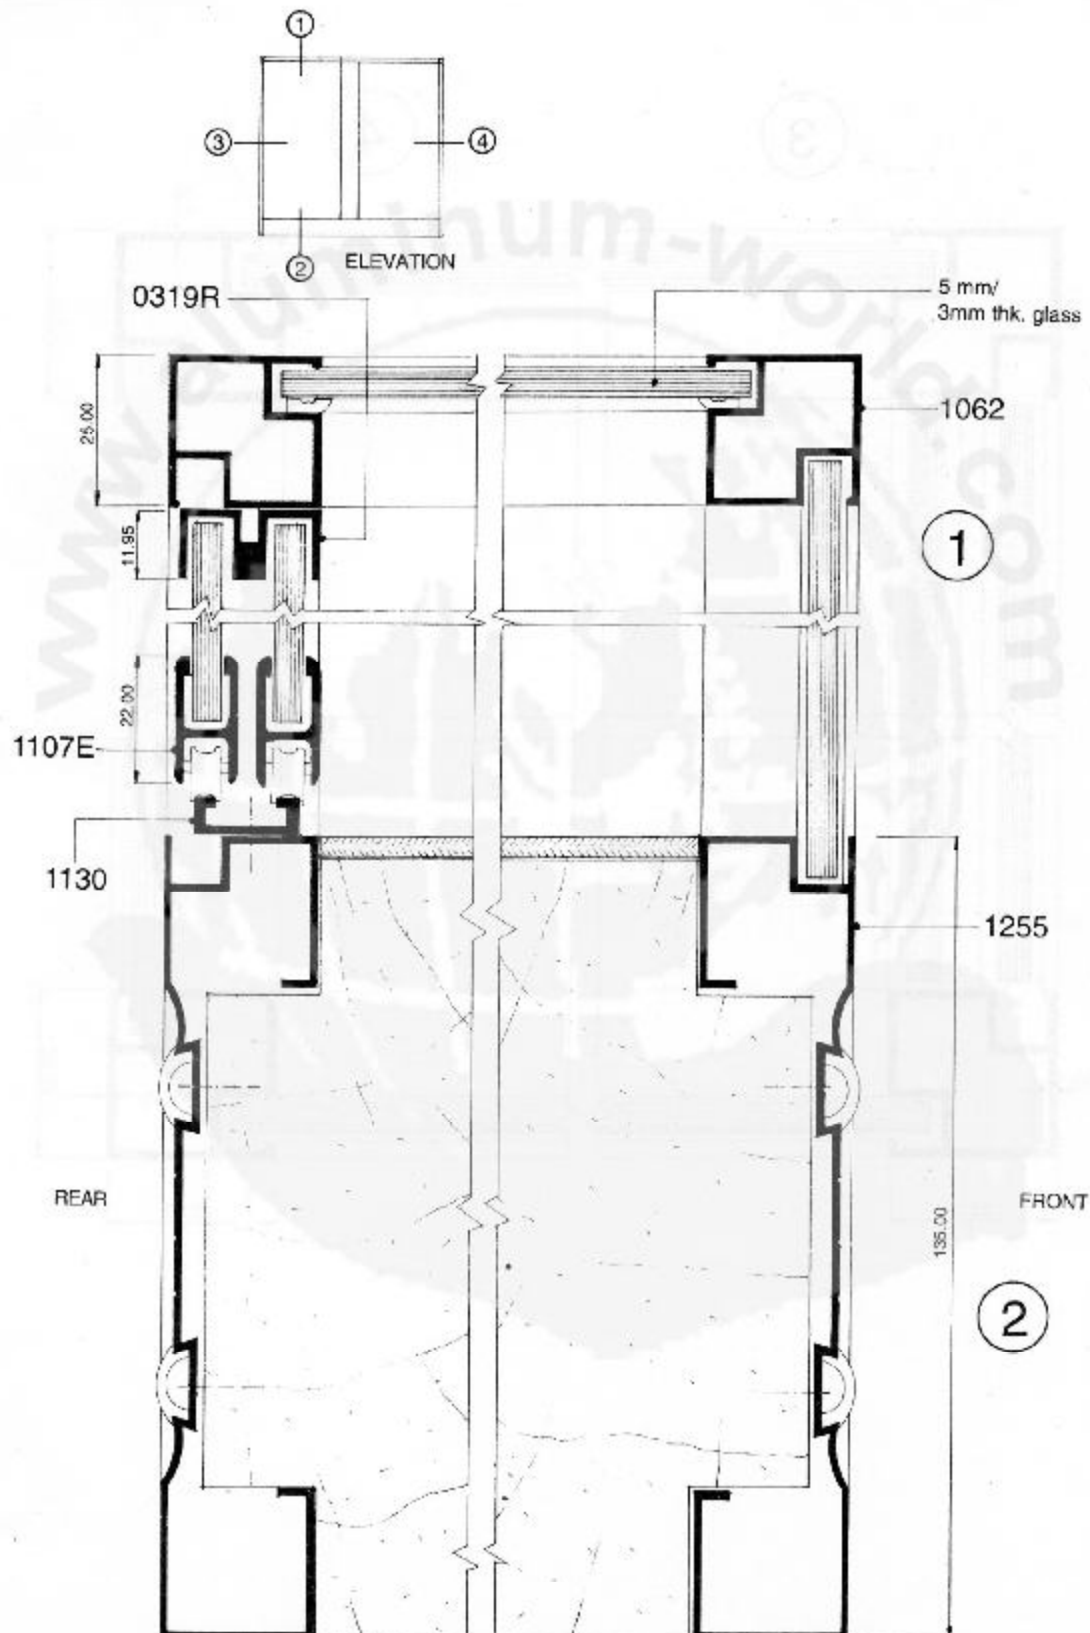



Consumer Application


Show Case

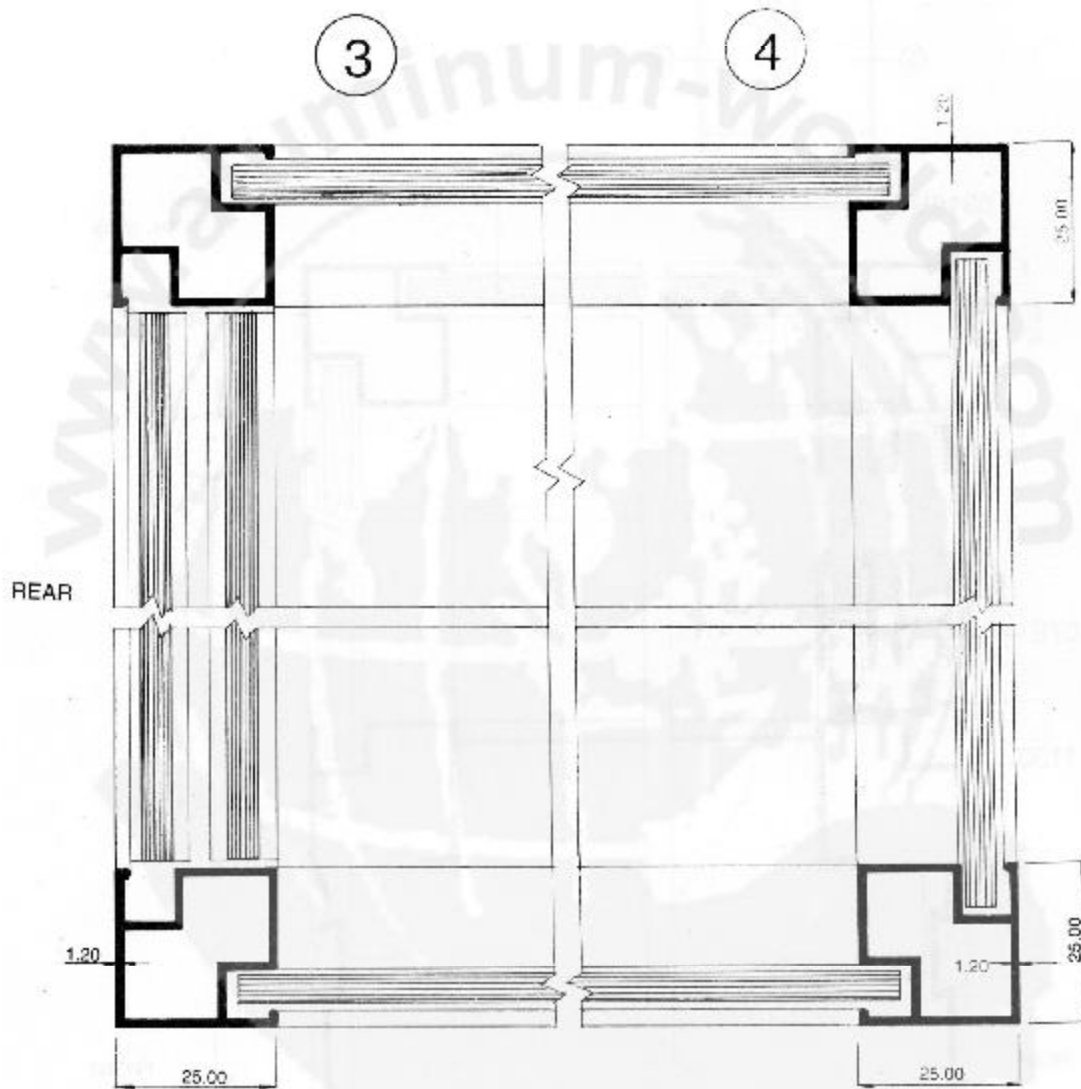




Consumer Application

Show Case




2168

W : 0.372 Kg/m
Per : 149.70 mm




2169

W : 0.435 Kg/m
Per : 192.20 mm

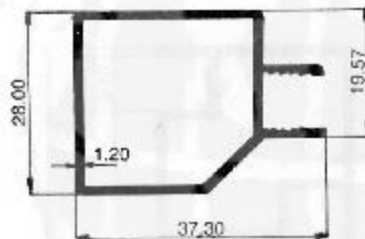


1625

W : 0.40 Kg/m
Per : 147.57 mm

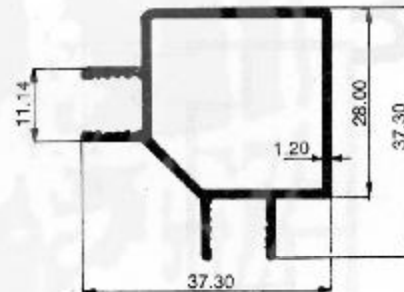


1624

W : 0.498 Kg/m
Per : 133.23 mm

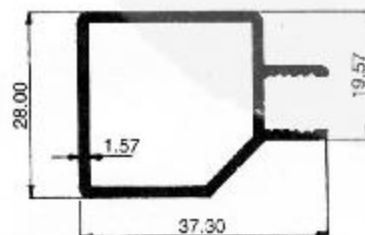

0873

W : 0.498 Kg/m
Per : 133.23 mm

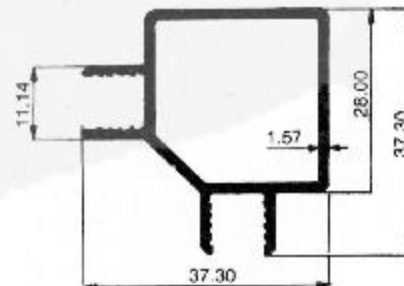


0872

W : 0.557 Kg/m
Per : 180.31 mm




Consumer Application

Show Case

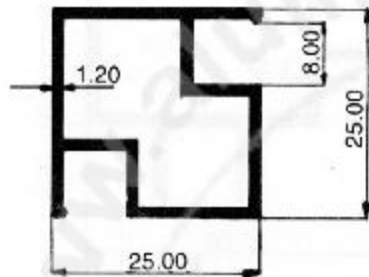


1122

W : 0.365 Kg/m
Per : 136.36 mm

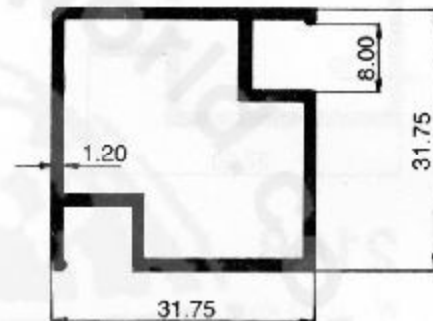


1062

W : 0.452 Kg/m
Per : 160.36 mm

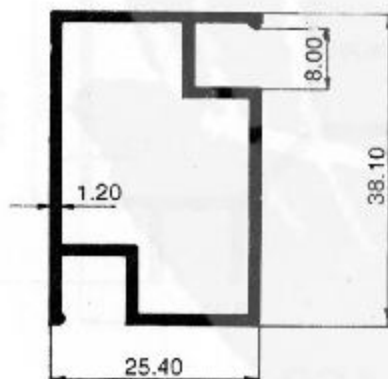


1127

W : 0.452 Kg/m
Per : 160.36 mm

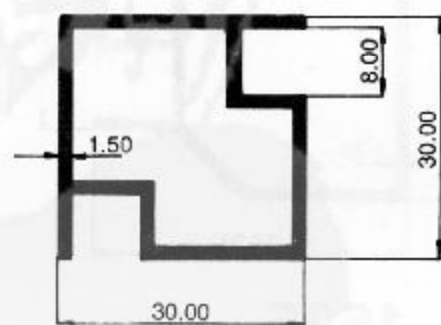


1022

W : 0.528 Kg/m
Per : 152.00 mm




0305

W : 0.406 Kg/m
Per : 210.22 mm




0306

W : 0.470 Kg/m
Per : 242.36 mm




0834

W : 0.405 Kg/m
Per : 101.60 mm




0515

W : 0.274 Kg/m
Per : 154.48 mm



1024

W : 1.053 Kg/m
Per : 116.80 mm

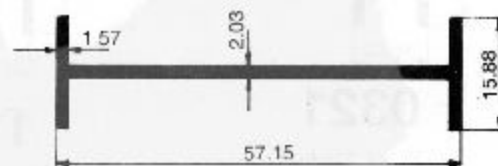


0322

W : 0.432 Kg/m
Per : 173.66 mm




Consumer Application

Show Case




0319R

W : 0.256 Kg/m
Per : 110.17 mm




1040

W : 0.224 Kg/m
Per : 118.17 mm




1547

W : 0.196 Kg/m
Per : 135.20 mm



0815

W : 0.210 Kg/m
Per : 131.20 mm




1359

W : 0.166 Kg/m
Per : 124.80 mm




0817

W : 0.287 Kg/m
Per : 175.00 mm



0321

W : 0.215 Kg/m
Per : 93.73 mm




1131

W : 0.185 Kg/m
Per : 70.23 mm




0324

W : 0.284 Kg/m
Per : 93.64 mm




0320

W : 0.173 Kg/m
Per : 56.94 mm



1130

W : 0.145 Kg/m
Per : 64.78 mm



0816

W : 0.109 Kg/m
Per : 65.60 mm




1133

W : 0.252 Kg/m
Per : 94.30 mm



Consumer Application

Show Case

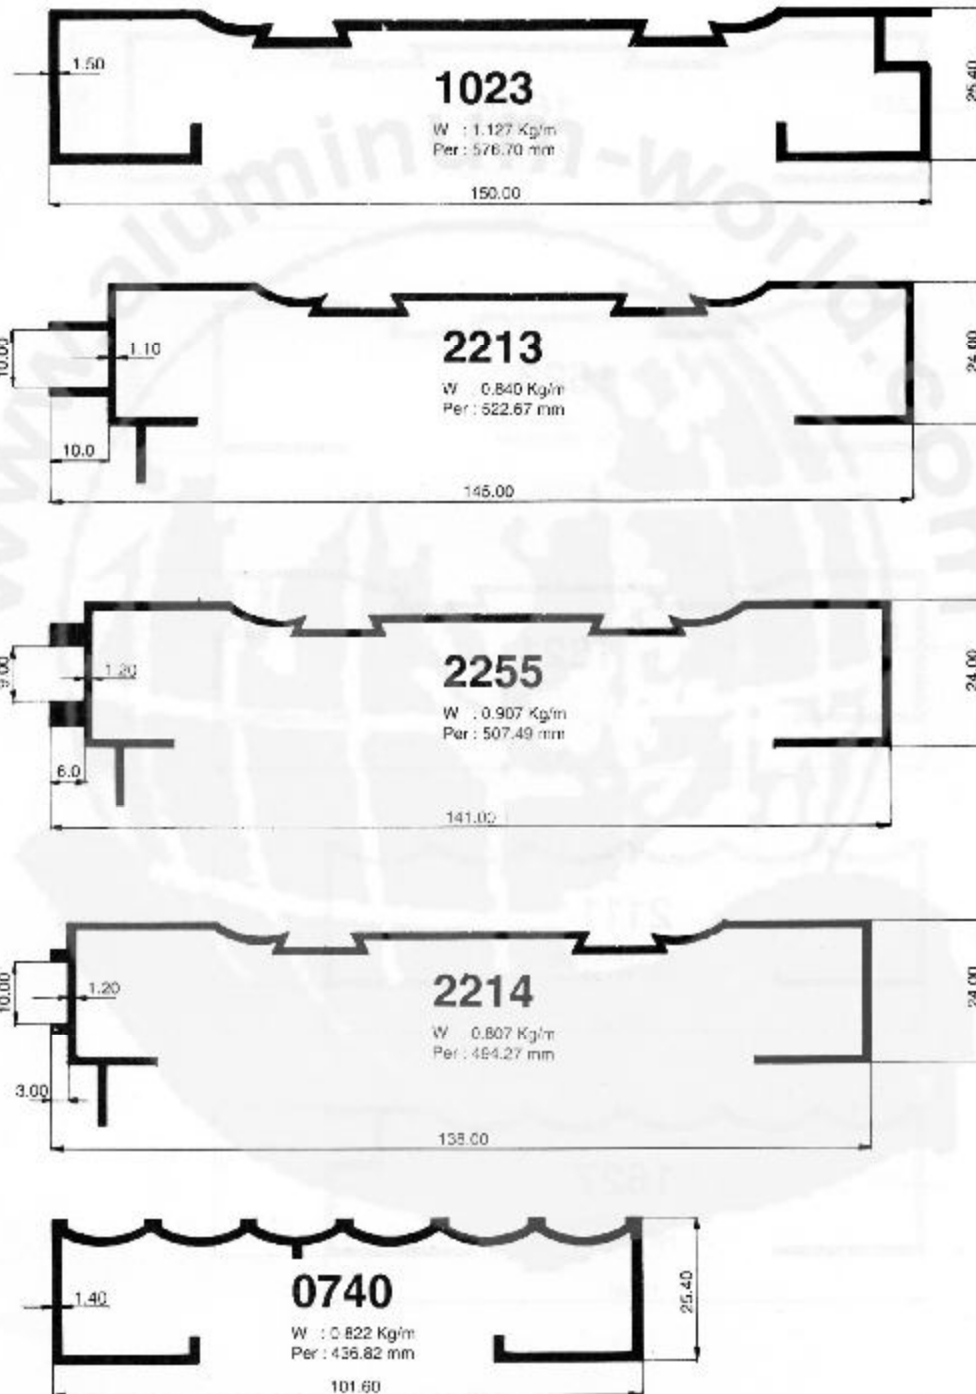



Consumer Application


Show Case





Consumer Application


Show Case

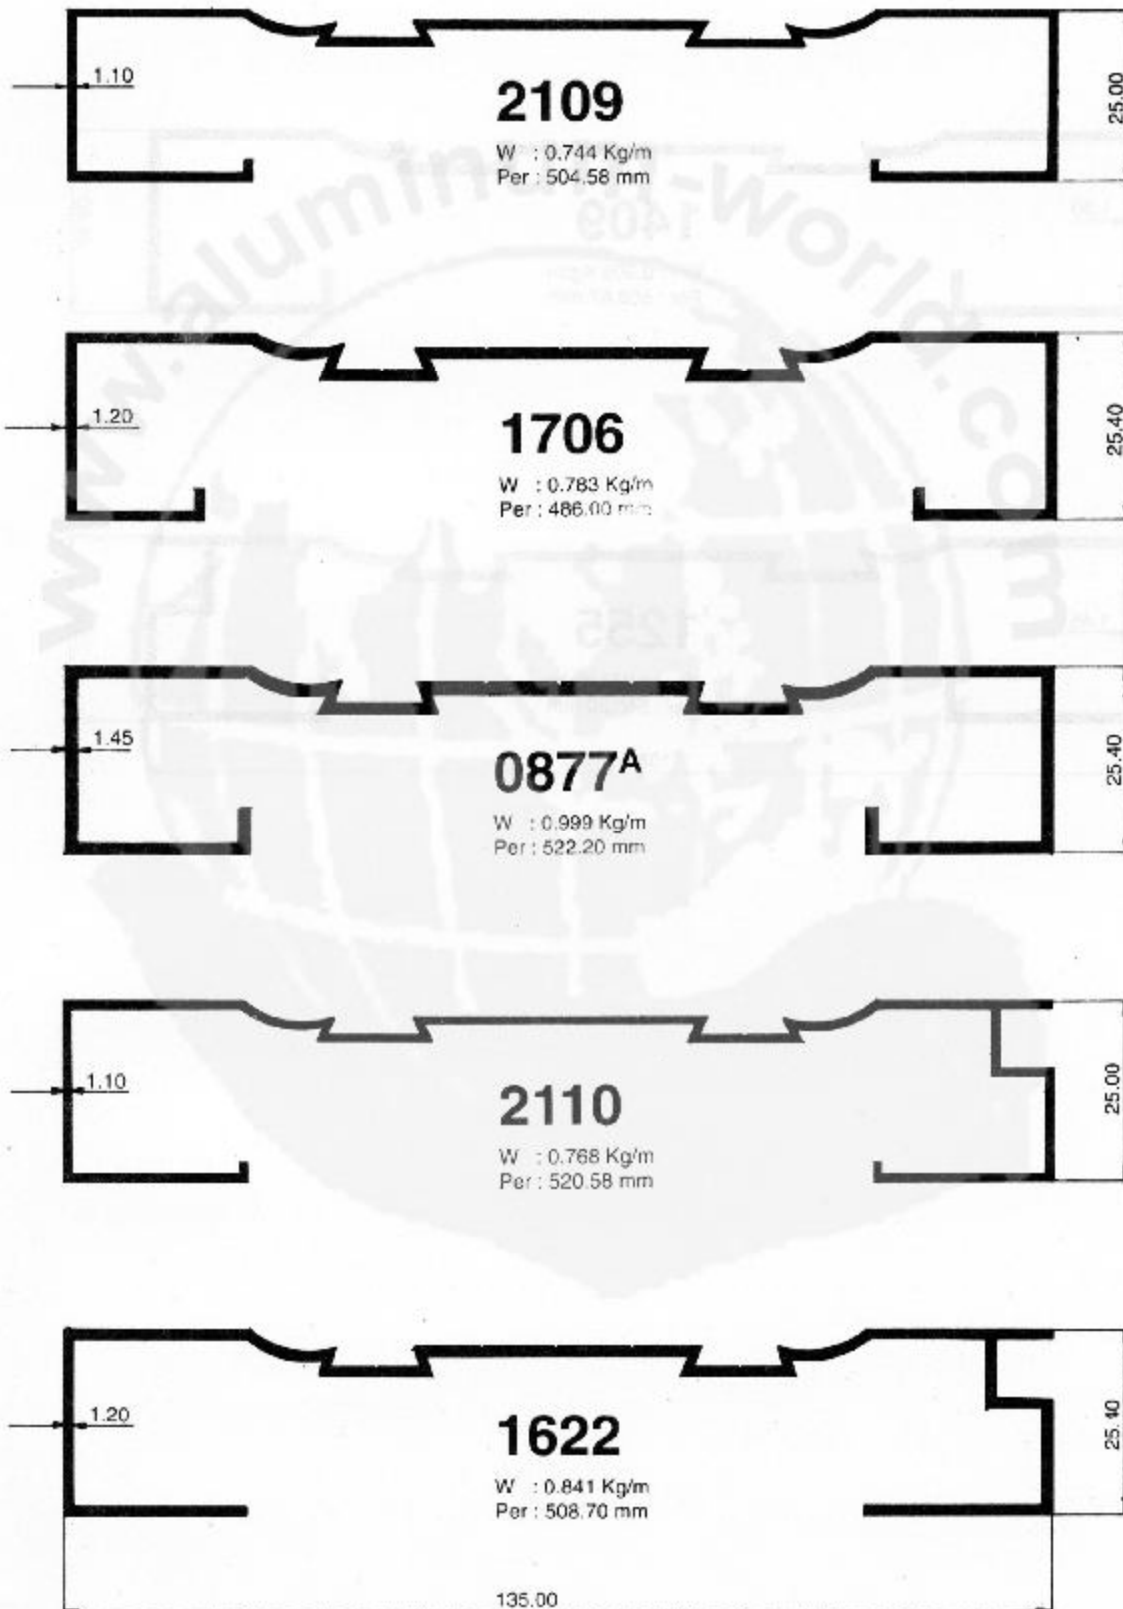




Consumer Application


Show Case

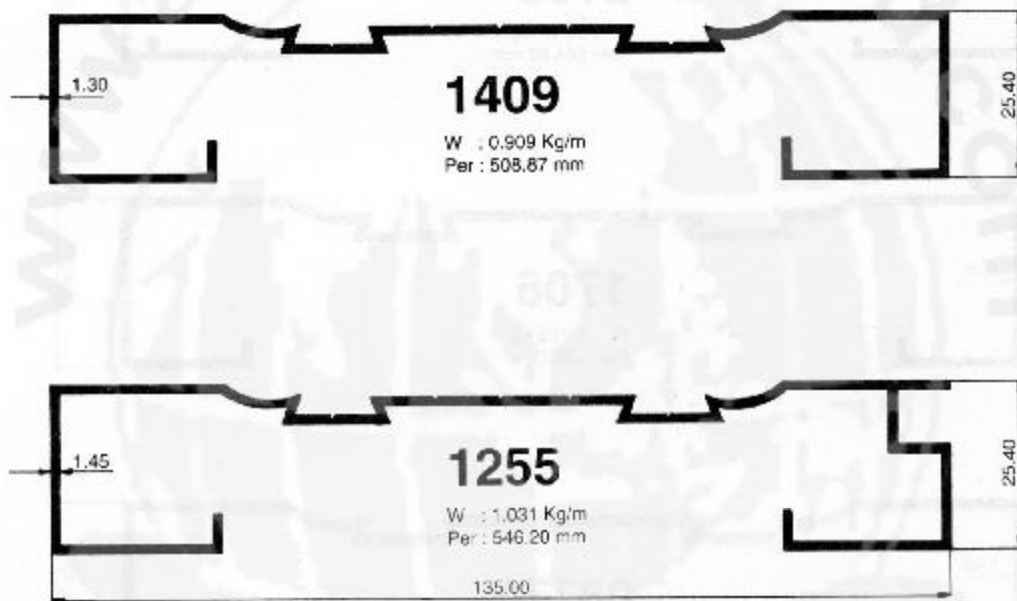

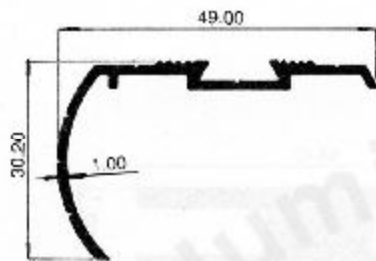


0979A

W : 0.249 Kg/m
Per : 188.87 mm

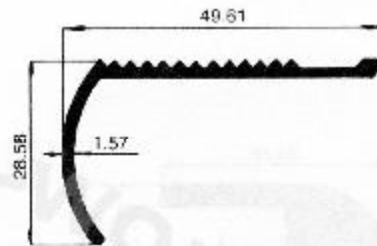


0042

W : 0.399 Kg/m
Per : 192.66 mm




0409

W : 0.305 Kg/m
Per : 132.41 mm

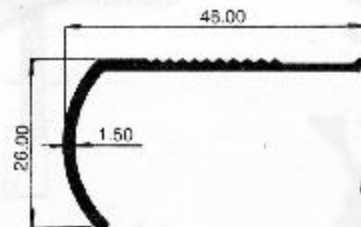


1401

W : 0.205 Kg/m
Per : 145.07 mm

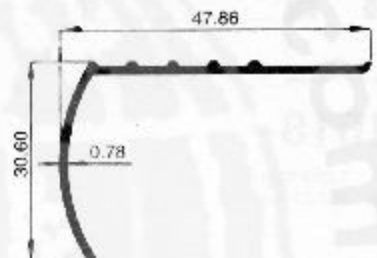


0394

W : 0.201 Kg/m
Per : 154.89 mm




0510R

W : 0.299 Kg/m
Per : 124.53 mm




1399

W : 0.158 Kg/m
Per : 107.92 mm

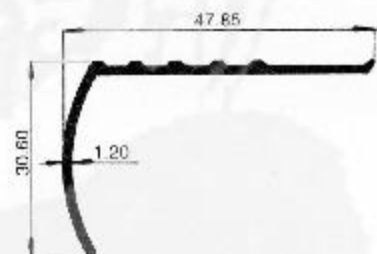


0694

W : 0.266 Kg/m
Per : 154.80 mm

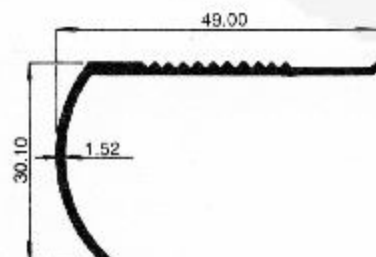

0532E

W : 0.299 Kg/m
Per : 154.67 mm

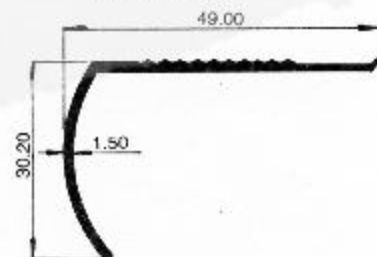


1068E

W : 0.290 Kg/m
Per : 168.54 mm




Consumer Application

Table Edging




0304

W : 0.161 Kg/m
Per : 86.18 mm




0330

W : 0.170 Kg/m
Per : 85.27 mm




0370

W : 0.064 Kg/m
Per : 44.76 mm



1949

W : 0.076 Kg/m
Per : 38.60 mm




0290

W : 0.165 Kg/m
Per : 97.04 mm




Consumer Application

Table Edging




1134

W : 0.095 Kg/m
Per : 61.66 mm




0802

W : 0.108 Kg/m
Per : 67.40 mm




0814^A

W : 0.096 Kg/m
Per : 75.41 mm




0776^A

W : 0.096 Kg/m
Per : 75.44 mm




0775

W : 0.150 Kg/m
Per : 84.03 mm




0774

W : 0.168 Kg/m
Per : 92.45 mm




0401^A

W : 0.077 Kg/m
Per : 59.14 mm




0396

W : 0.105 Kg/m
Per : 65.10 mm




1135

W : 0.115 Kg/m
Per : 74.36 mm



0402^A

W : 0.049 Kg/m
Per : 41.60 mm




1407

W : 0.080 Kg/m
Per : 61.85 mm




Consumer Application

Wall Board




0406^A

W : 0.105 Kg/m
Per : 81.05 mm




0427

W : 0.104 Kg/m
Per : 80.86 mm




0556^R

W : 0.174 Kg/m
Per : 115.96 mm




0563^R

W : 0.143 Kg/m
Per : 90.47 mm



1397

W : 0.095 Kg/m
Per : 73.14 mm



1398

W : 0.096 Kg/m
Per : 71.44 mm